


SP43 Series Dimension Diagram(unit: mm)

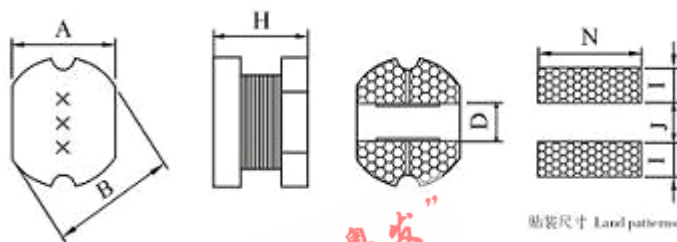

TYPE	A(± 0.3)	B(± 0.3)	H(± 0.3)	D	N	I	J
SP43	4.0	4.5	3.2	1.2	4.5	2.0	1.0

SP43 Series Electrical Characteristics:

PART NO.	L (μ H)	L TEST	DCR (Ω)	IDC (A)
	INDUCTANCE	FREQUENCY	MAX	MAX
SP4532-1R0M	1.0	7.96 MHZ	0.033	3.80
SP4532-1R4M	1.4	7.96 MHZ	0.038	3.30
SP4532-1R8M	1.8	7.96 MHZ	0.042	2.91
SP4532-2R2M	2.2	7.96 MHZ	0.047	2.60
SP4532-2R7M	2.7	7.96 MHZ	0.052	2.43
SP4532-3R3M	3.3	7.96 MHZ	0.058	2.15
SP4532-3R9M	3.9	7.96 MHZ	0.076	1.98
SP4532-4R7M	4.7	7.96 MHZ	0.094	1.70
SP4532-5R6M	5.6	7.96 MHZ	0.101	1.60
SP4532-6R8M	6.8	7.96 MHZ	0.117	1.41
SP4532-6R8M	6.8	7.96 MHZ	0.117	1.41
SP4532-8R2M	8.2	7.96 MHZ	0.132	1.26
SP4532-100M	10	2.52 MHZ	0.182	1.15
SP4532-120M	12	2.52 MHZ	0.210	1.05
SP4532-150M	16	2.52 MHZ	0.235	0.92
SP4532-180M	18	2.52 MHZ	0.338	0.84
SP4532-220M	22	2.52 MHZ	0.378	0.76

SP4532-270M	27	2.52 MHZ	0.522	0.71
SP4532-330M	33	2.52 MHZ	0.540	0.64
SP4532-390M	39	2.52 MHZ	0.587	0.59
SP4532-470M	47	2.52 MHZ	0.844	0.54
SP4532-560M	56	2.52 MHZ	0.937	0.50
SP4532-680M	68	2.52 MHZ	1.117	0.46
SP4532-820M	82	2.52 MHZ	1.200	0.48

Notes:

1, the inductance tolerance: J +5%; K +10%; L +15%; M +20%, customers can choose according to their own conditions, inductance tolerance!

2, if the standard exceeds the requirements of the above, you can also customize the product according to customer's needs!

“电感品质佳，选粤发”
www.yfbalun.com
Tel:+86-756-3806076